

GVB IFB 2020-001
REFERENCE 2

EXISTING MEDIAN UPLIGHT CATALOG CUTS

R2/p1


(2/2)

(2/3)

HABCO

STREET LIGHTING
 JOB NAME TUMON BAY PROJECT
 TYPE ITEM 003

**CATALOG # 1020-H
 SPECIFICATIONS:**

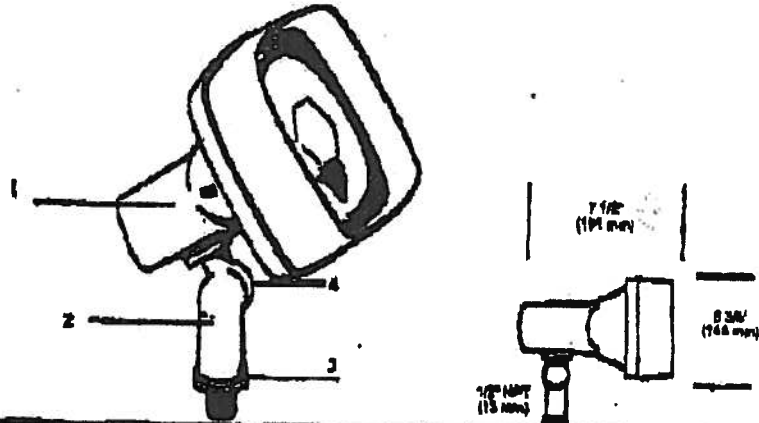


Construction- Body (#1), locknut (#3), and fully rotatable mounting arm (#2) are all die cast aluminum. Fasteners (#4) are 300 series stainless steel.
Note: The mounting arm has 1/2" NPT male threads to screw on to accessory mounting stake or junction box, sold separately.

Finish- Bronze (H) finish is thermoset powder coat. Finish suffix must be added to complete the catalog number.

Electrical- U.L. & cU.L. listed for wet location. Socket is porcelain medium base. Fixture is 120 volt, prewired with high temperature #18 wire.

R2/p2

[previous page](#)

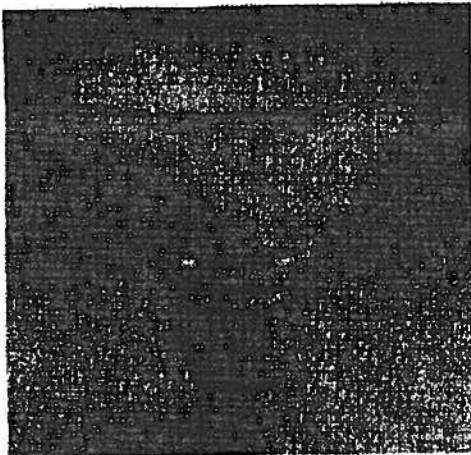

Product Number: 14579
Order Abbreviation: 90PAR/CAP/SPL/FL30 120V
General Description: Tungsten Halogen
CAPSYLITE PAR38 Reflector
Lamp Medium Skirt Base
90Watt 120Volt Flood
Beam

Product Information

Abbrev. With Packaging Info.	90PARCAPSPLFL30 120V 15/CS 1/SKU
Approx. Lumens	1310
Average Rated Life (hr)	2500
Base	E26 Medium Skirted
Beam Angle (deg)	30
Beam Type	FL
Bulb	PAR38
Centerbeam Candlepower (cp)	3500
Class	C (gas)
Color Rendering Index (CRI)	100
Color Temperature/CCT (K)	2950
Diameter (in)	4 3/4
Ecologic	YES
Family Brand Name	CAPSYLITE® PAR38 SPL
Filament	CC-8
Maximum Overall Length - MOL (in)	5 5/16
Maximum Overall Length - MOL (mm)	135
Nominal Voltage (V)	120.00
Nominal Wattage (W)	90.00
Value Added Product	YES
Unit	EA

Product Documents, Graphs, and Images

Packaging Information



Footnotes

* In base up operation, heat may eventually deteriorate paper-lined or plastic sockets.

[previous page](#)

print